


Technical Data Sheet

Classic Parquet Floors

435 Kingston SB

Ship deck 3-strip, Classic grading

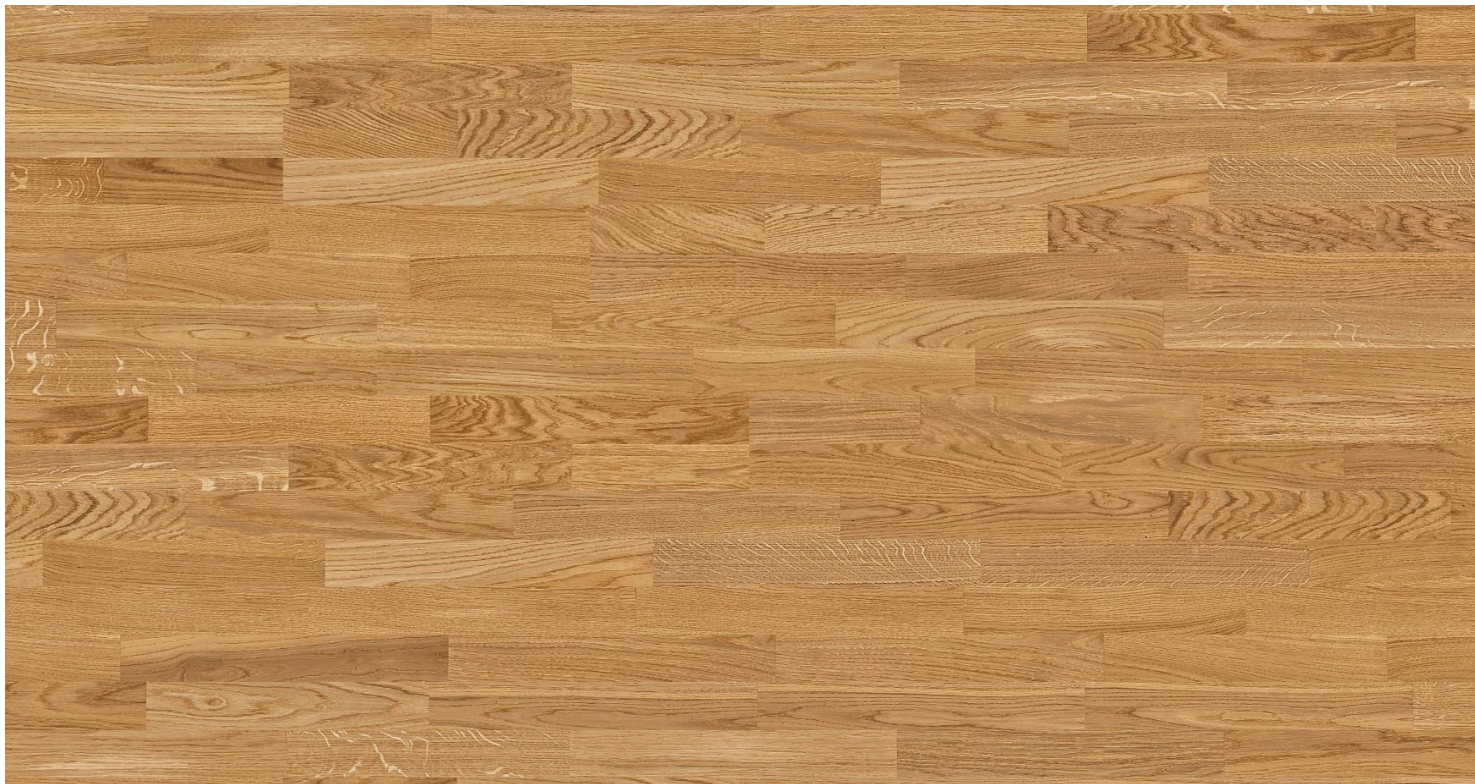

Article number(s):	E3801 E3802 E3803
	E3804 R3803


Grading description	
Sapwood	healthy sapwood 10 mm wide permitted
Knots	isolated healthy knots up to 50 mm, filled knots up 4 mm diameter
Black knots	isolated black pin knots up to 10 mm diameter
Annual ring position	Quarter sawn, half-quarter sawn, vein, distinctive cross-vein and silver figure
Colour differences	uniform to irregular, wood coloured streaks; slight drying discolourations, brilliant 8-10 mm wide white streaks along the annual rings
Cracks	not permitted
Worm holes	1-2 filled work holes per finger
Drying & storage damage	not permitted
Filled cracks	filled permitted

Technical Data Sheet

Classic Parquet Floors

435 Kingston SB

Ship deck 3-strip, Villa grading

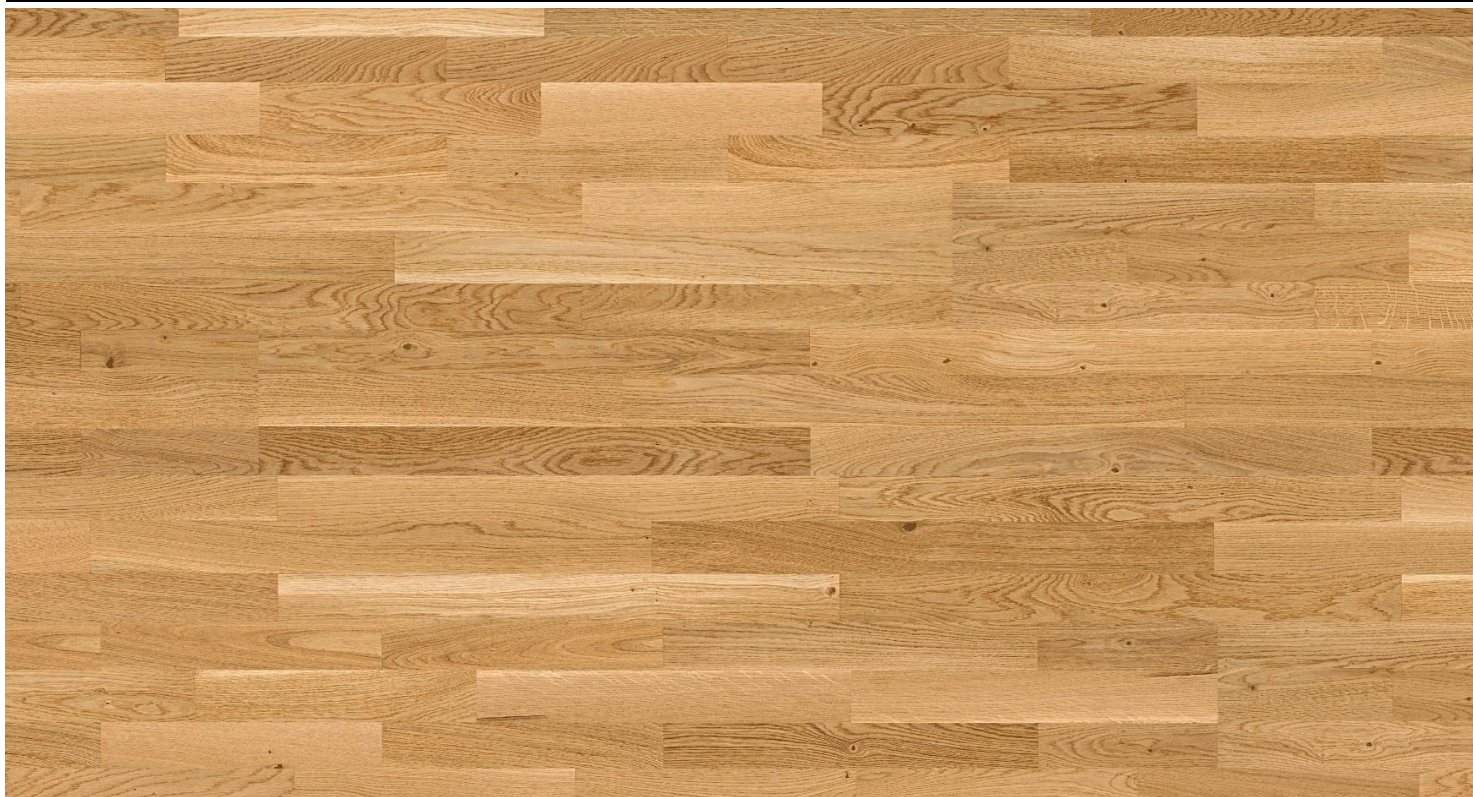

Article number(s):	E6801

Grading description

Sapwood	healthy sapwood with size equal to max. 1/2 the finger width and max. 25 %
Knots	healthy knots up to 12 mm diameter, filled knots up to 10 mm and max. 25 %
Cracked knots	cracked knots up to 15 mm diameter (filled) in max. 25 % of the fingers
Annual ring position	Quarter sawn, half-quarter sawn, vein, distinctive cross-vein and silver figure
Colour differences	uniform to very irregular, wood coloured streaks; slight drying discolourations, brilliant 8-10 mm wide white streaks along the annual rings
Cracks	not permitted
Worm holes	1-2 filled work holes per finger
Drying & storage damage	isolated brown streaks on the end faces and stick marks
Filled cracks	filled permitted

Technical Data Sheet

Classic Parquet Floors

435 Kingston SB

Despite careful quality controls, up to 3 % of the strips in a lot can come from a different grade. (EN 13489)

Material / Construction	
Construction	Surface layer: 3.5 mm finger +/- 0.2 mm
	Middle layer: 8.0 mm softwood strips
	Backing: 2.0 mm softwood veneer
Surface appearance	3-strip ship deck
Surface treatment	Natural oil (finally oiled ready for use), Velvet (matt varnished ready for use)
Connection system	ProConnect laying system
Laying options	floating installation or full adhesive bonding

Dimensions and tolerances in accordance with EN 13489. Dimensional characteristics and permitted dimensional deviations, which have been determined in the factory, have been given in accordance with the type of elements for multi-layered floors.

Dimensions of the individual element	
Dimension	Tolerances
Thickness: 13.5 mm	
Length: 2,200.0 mm	
Width: 206.0 mm	
Permitted deviation of the width	± 0.2 mm
Permitted deviation of the squareness	≤ 0.2 % across the width
Permitted length deviation	Not applicable
Lengthwise curvature across the element	≤ 0.1 % along the length
Cup	≤ 0.2 % across the face
Vertical offset (lippings)	≤ 0.2 mm between the elements

Product characteristic	
Moisture content	5 - 9 % at the time of first delivery to EN 13489
Reaction to fire	D _{fl} s1
Formaldehyde emission	E1
Thermal resistance	approx. 0.093 m ² *K/W, suitability on hot water underfloor heating

Technical Data Sheet

Classic Parquet Floors

435 Kingston SB

Packaging

Contents (area) per pack	2.72 m ²
Contents per pallet	122.36 m ²
Number of elements per pack	6
Packs per pallet	45



General product data

Declaration of performance	PAR1501533
----------------------------	------------

NOTE

Wood is a natural product and its colour and texture can therefore differ. Samples, brochures and photos are therefore only approximate and are not binding. The action of sunlight also influences the natural change in wood colour. As a result, the product at the time of delivery can have clear differences to the sample provided.

Certificates*



* except article R3803

03 | 2020

E & OE. Subject to change without notice. All previous data sheets are superseded by this issue.

W. & L. Jordan GmbH | Horst-Dieter-Jordan-Straße 7-10 | D-34134 Kassel | info@joka.de | http://www.joka.de
INKU Jordan GmbH & Co. KG | IZ-NÖ Süd | Straße 3 | A-2355 Wiener Neudorf | info@inku.at | www.inku.at

